




AXO GB Series Balers

**Innovative
Robust
Reliable**

**GB-7575F
GB-0505F**

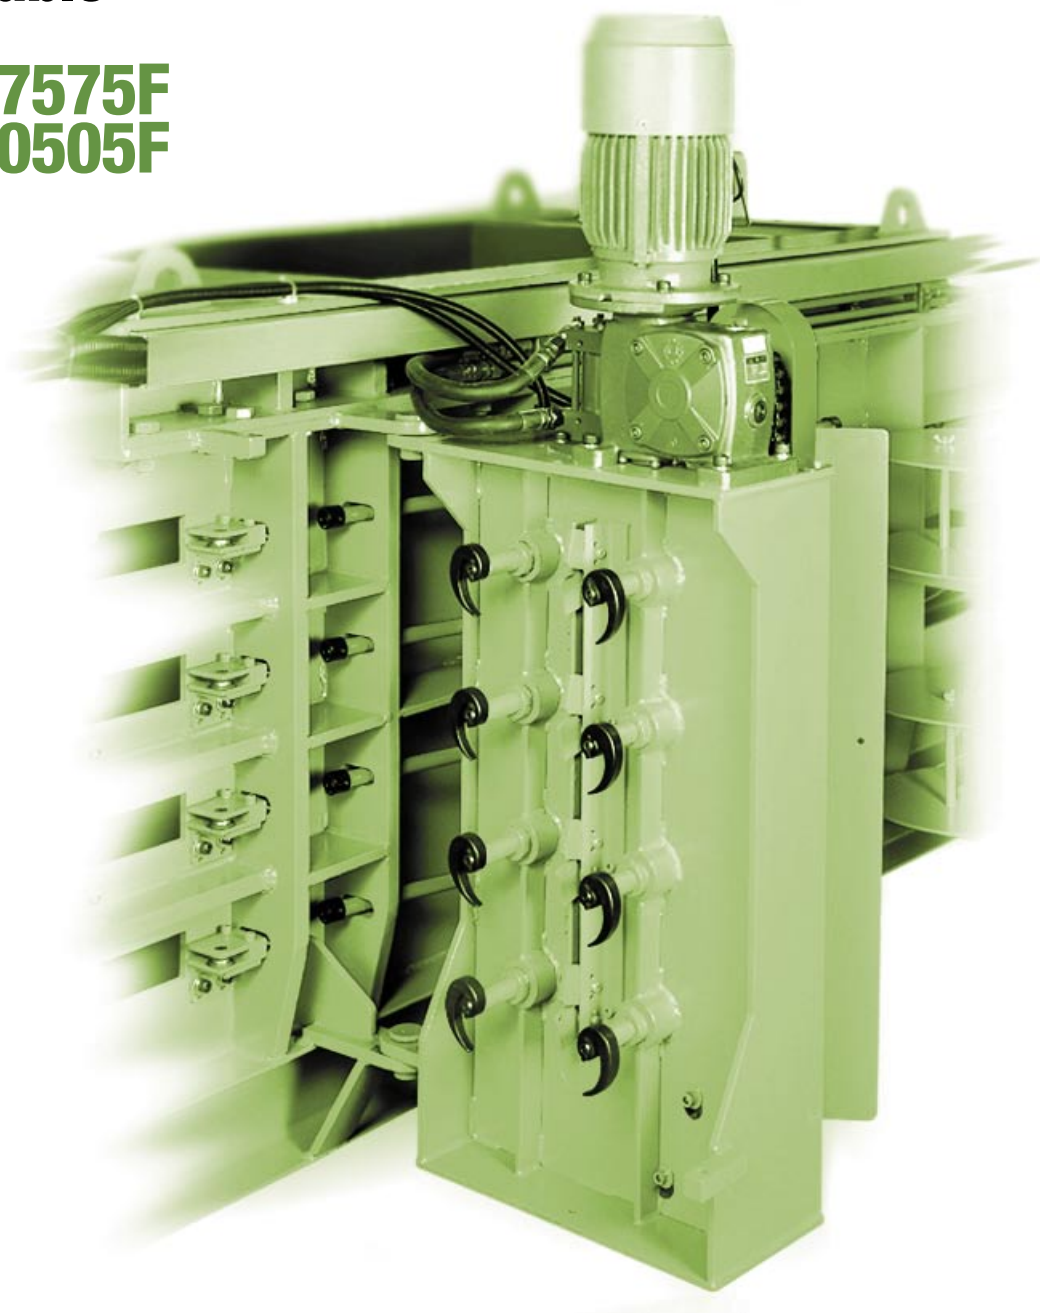

CE

GB-7575F / GB-0505F

Special Features

- 4-way free-floating self-adjusting chamber automatically adjusts to the specific requirements of varied materials being baled.
- Our unique shear cutter reduces the amount of energy required to separate product at the chamber entry. This feature markedly increases efficiency and results in longer life for many effected baler parts.
- GB Series Baler wire inserters have the ability to cope with even very dense product. Our heavy-duty design and hydraulic power ensures continuous operation.
- Twister operation and travel is contained within a housing for protection against impact and contaminates. Required cleaning of moving components is less regular due to our innovative design.
- Our trunnion-mounted cylinder is a feature that sets the GB-Series Balers apart from traditional balers. This feature greatly reduces stress on the cylinder, ram and the structure of the baler. Life of our seals and packing rings is far greater than other machines because of this feature.
- Meets all OSH requirements and is CE Certified.
- Simple installation without requirement for special foundations.



Our hydraulic system is designed and specified for continuous operation, 24/7.

Features of our drive system include low noise, low heat, load sensing pumps, and energy efficient components.



Our unique shear cutter reduces the amount of energy required to separate product at the chamber entry.

This feature markedly increases efficiency and results in longer life for many effected baler parts.

Automatic Baling Press

Professional Recycling Equipment for the Economical Transport of Waste Material

AXO GB Series Balers are designed to assist the efficient and economical transport of recycled product.

Bale size and density are tailored to best suit materials handling equipment and shipping container dimensions.



The operation panel allows safe and simple operation.


This panel also acts as the diagnostic, monitoring and troubleshooting interface.

Our PLC control and feedback (IO) cooperates with our comprehensive manual and procedure guide to ensure ease of use for any operator



Twister operation and travel is contained within a housing for protection against impact and contaminates.


Required cleaning of moving components is less regular due to our innovative design.

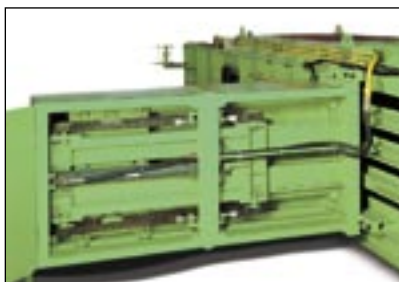

GB Series Baler wire inserters have the ability to cope with even very dense product.

Our heavy-duty design and hydraulic power ensures continuous operation.

GB-7575F / GB-0505F

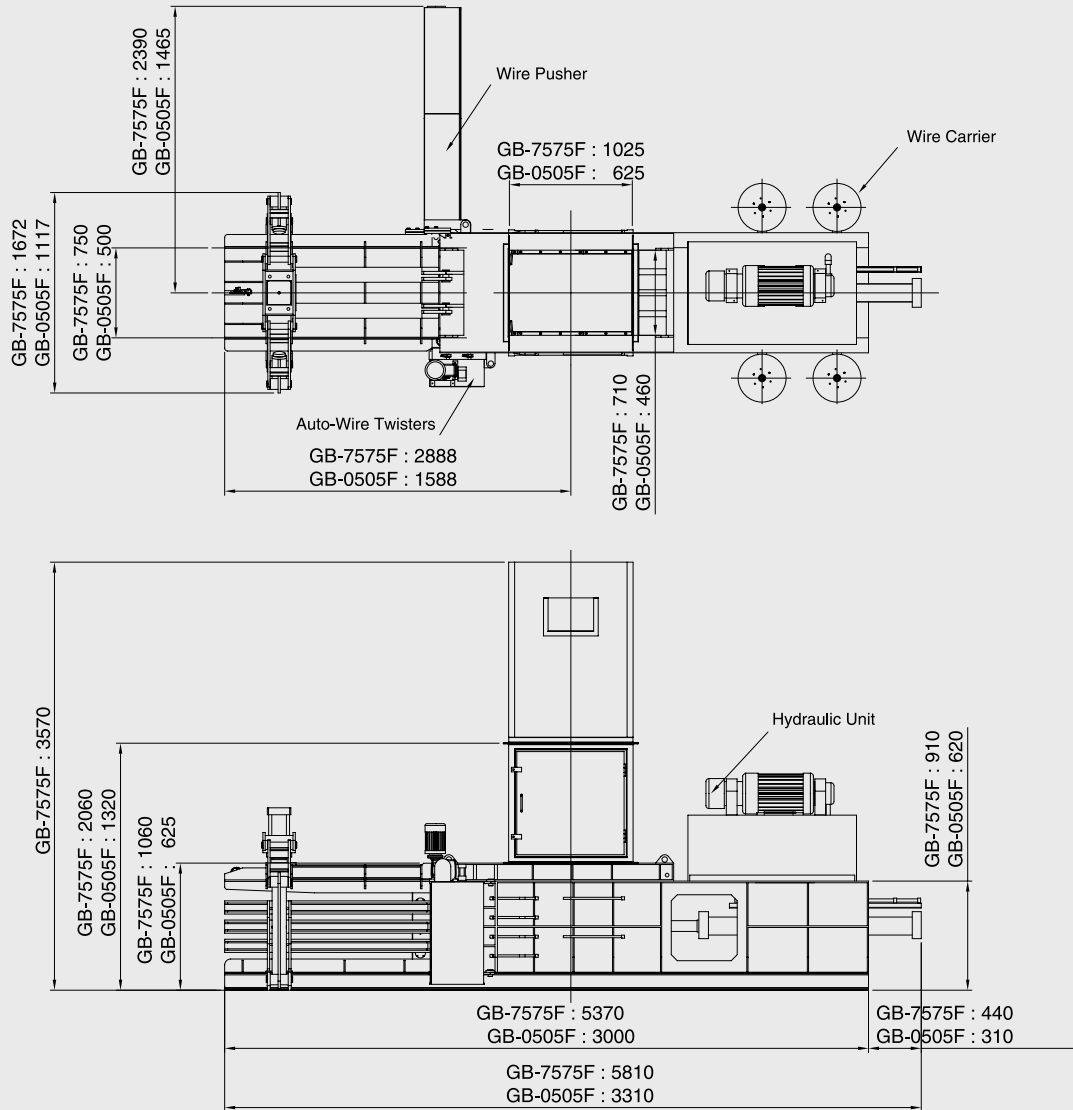

TYPE	GB-7575F	GB-0505F
Hydraulic Power	20HP / 30HP/ 40HP	10HP
Bale Dimension	750mm(W)x750mm(H)x(Adjustable Length)	500mm(W)x500mm(H)x(Adjustable Length)
Bale Density	450~550kg/m ³	450~550kg/m ³
Compaction Ram/Cylinder	ø150 / ø180 mm	ø125 mm
Max Thrust Force	40 Ton(ø150) / 50 Ton(ø180)	21 Ton
Feed Opening Dimensions	1100 x 660mm	625 x 460mm
Number of Wires	4 Lines	3 Lines
Capacity (For O.C.C. ø150)	3.5(20HP) / 5(30HP) / 7(40HP)TPH	1 TPH
M/C Weight	7 Tons	3 Tons



AXO Shredders Ltd
AUSTRALASIA

Phone: +64 4 4993028
Fax: +64 4 4997928
Email: info@axo.cc



AXO Shredders
Japan

Phone: +81 6 6930 6677
Fax: +81 6 6930 3660
Email: japan@axo.cc



AXO Shredders
UK/EUROPE

Phone: +44 1234 345534
Fax: +44 1234 349049
Email: uk@axo.cc



AXO Shredders Corp.
NORTH AMERICA

Phone: (519) 745 8562
Fax: (519) 745 4854
Toll-Free: 866-246-5634
Email: usa@axo.cc



AXO Shredders
CHINA

聯絡人
紐西兰总公司
雷婷
Email: ting@axo.cc