




**AXO's new FATSO Shredder range** are the most efficient, robust and maintenance friendly Shredders in the market today. The FATSO range lifts the bar in Shredder design, with many features new to the industry.

- All models have new specific cutter geometry to increase and maximize throughput per kW
- "HH" indicates specific models with replaceable concave Hard-Heads.
- "XH" indicates cutter-shaft material specific for hard-drives and e-waste.
- Intelligent motor control giving +40% knife tip force
- Sealed Labyrinth, Hard-faces and bearing assemblies reducing recommended maintenance to once per year
- Proprietary AXO Intelligent designed Inverter Software specific for the FATSO Shredder application
- Reduced cost of replacement Cutter-Shafts
- All components from leading European suppliers

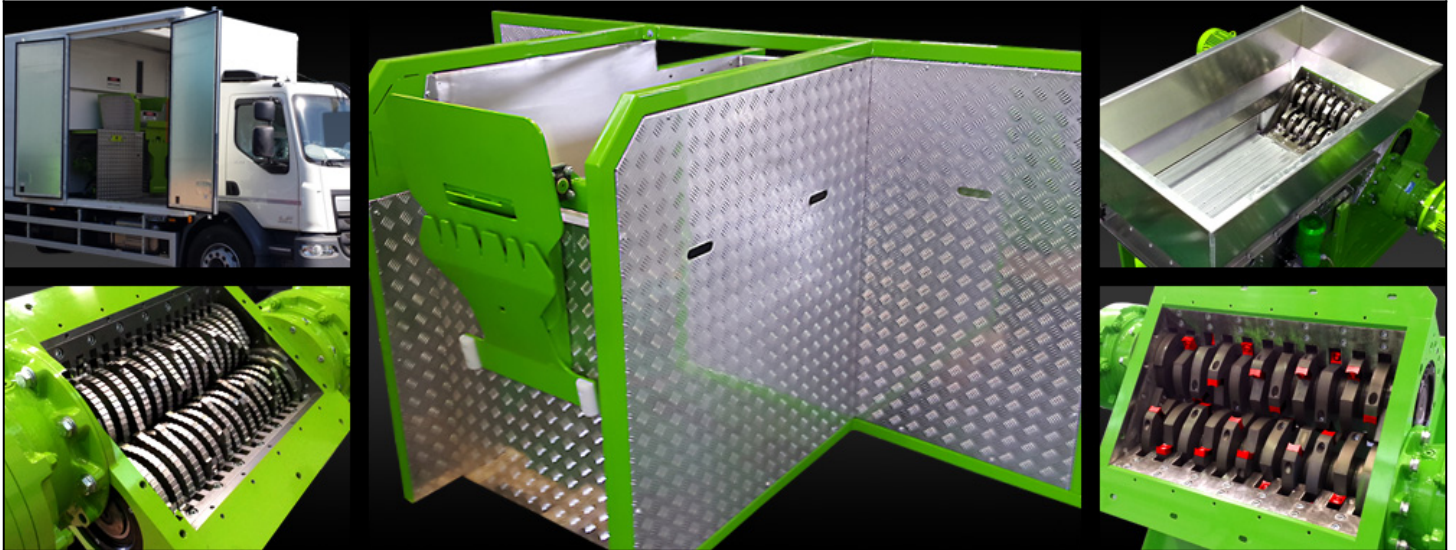

**Modular** - the FATSO range has been specifically designed to allow Modular set-up of Multi-Stage Shredders and to integrate with other AXO components such as Level-Feed hoppers, Transfer Screws, Balers, Conveyors, and Shred-Trucks.



**Industrial Shredders**



**Shred-Trucks**



**Balers**



**Hard-Heads**



**Plant Installations**



**Level-Feed**



**Transfer Screws**

FATSO Shredders come in a range of sizes to cover Single and Multi-Stage shredding applications up to 6 ton per hour.

Fatso Model	Chamber L		Chamber W		Cut size W		Cutter OD		kW		Per-Hour (Up to)	
	mm	in	mm	in	mm	in	mm	in	kW	hp	kg	lbs
FAT-240-24XH-5	240	9 1/2"	245	9 5/8"	24	1"	155	6 1/8"	2x1.1	2x1.5	200	440
FAT-500-10-22	512	20"	322	13"	10	3/8"	170	7"	2x9.2	2x12.5	1,150	2,530
FAT-500-12-22	512	20"	322	13"	12	1/2"	170	7"	2x9.2	2x12.5	1,500	3,300
FAT-500-16-22	512	20"	322	13"	16	5/8"	170	7"	2x9.2	2x12.5	1,800	4,000
FAT-500-24HH-22	512	20"	322	13"	24	1"	170	7"	2x9.2	2x12.5	1,800	4,000
FAT-512-10-30	512	20"	380	15"	10	3/8"	200	8"	2x15	2x20	1,800	4,000
FAT-512-12-30	512	20"	380	15"	12	1/2"	200	8"	2x15	2x20	2,250	5,000
FAT-512-16-30	512	20"	380	15"	16	5/8"	200	8"	2x15	2x20	3,000	6,600
FAT-704-16-30	704	27 5/7"	482	19"	16	5/8"	240	9"	2x15	2x20	3,500	7,700
FAT-704-22-30	704	27 5/7"	482	19"	22	6/7"	240	9"	2x15	2x20	4,000	8,800
FAT-704-32HH-30	704	27 5/7"	482	19"	32	1 3/13"	240	9"	2x15	2x20	6,000	13,000
FAT-832-16-60	832	32 3/4"	550	21 4/6"	16	5/8"	275	11"	2x30	2x40	5,000	11,000
FAT-832-32HH-60	832	32 3/4"	550	21 4/6"	32	1 3/13"	275	11"	2x30	2x40	7,500	16,500
FAT-1000-25HH-60	1,000	39 3/8"	550	21 4/6"	25	1"	300	12"	2x30	2x40	7,500	16,500
FAT-1000-40HH-74	1,000	39 3/8"	550	21 4/6"	40	1 7/13"	300	12"	2x37	2x50	10,000	22,000

Throughput figures vary according to feed method product type being shredded and other processing equipment. AXO does not guarantee throughput rates at any particular plant. Throughput figures shown are based on actual throughput rates achieved in the field however variable factors mean these rates cannot always be sustained.

**Shred-Tech Asia Co., Ltd. (Thailand)**  
789/52 Moo 1, Nong-Kham, Sriracha, Chonburi, Thailand 20230  
+66 3834 8250-2  
info@shred-tech.asia | www.shred-tech.asia

**Shred-Tech Corp. (Canada)**  
295 Pinebush Rd. Cambridge, Ontario Canada N1T 1B2  
+1 (519) 621-3560  
shred@shred-tech.com | www.shred-tech.com

**Shred-Tech® Australasia (AU)**  
PO Box 620, South Yarra, Victoria 3141 Australia  
+61 0498 730 684  
justin@shred-tech.asia |